



Limited Edition

B/A
PRODUCTS CO.

TOWING STAPLES CATALOG



HI-VIZ GRADE 100 & 120 CHAIN

Coming Soon..


G70 5/16" Chain with 15" J Hook On One End; Grab, R, T & Mini J Hooks On The Other End

PART #	LENGTH	UNIT	WLL	WT
N711-6LUG10	10'	PR	4,700 lbs.	32 lbs.
N711-6LUG8	8'	PR	4,700 lbs.	29 lbs.
N711-6LUG6	6'	PR	4,700 lbs.	26 lbs.



G70 5/16" Chain with 15" J Hook On One End; Grab & T Hooks On The Other End

PART #	LENGTH	UNIT	WLL	WT
N711-6	10'	PR	4,700 lbs.	31 lbs.
N711-6B	8'	PR	4,700 lbs.	26 lbs.
N711-6A6	6'	PR	4,700 lbs.	22 lbs.

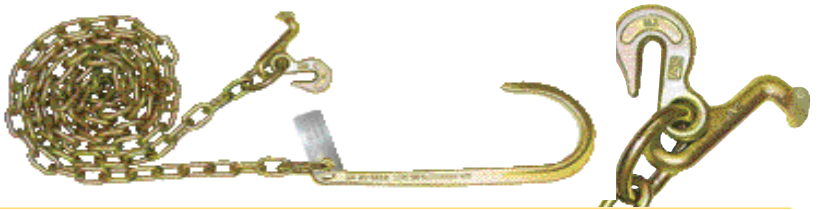

⚠️ *ALL V-CHAIN WORKING LOAD LIMITS ARE AT A 60° ANGLE



G70 V-Chain with 15" J Hooks & Hammerhead™ T-J Combo Hooks 5/16" Chain. Grab Hooks at Pear Link

PART #	LENGTH	UNIT	WLL	WT
N711-8H	2' Legs	EA	5,400 lbs.*	17 lbs.
N711-8H3	3' Legs	EA	5,400 lbs.*	19 lbs.



G70 V-Chain with R Hooks, T Hooks & Mini J Hooks 5/16" Chain. Grab Hooks at Pear Link

PART #	LENGTH	UNIT	WLL	WT
N711-8LU2	2' Legs	EA	5,400 lbs.*	12 lbs.
N711-8LU	3' Legs	EA	5,400 lbs.*	14 lbs.
N711-8LU6	6' Legs	EA	5,400 lbs.*	19 lbs.





G70 5/16" Chain with Heavy Duty Latched Sling Hook On One End

PART #	LENGTH	UNIT	WLL	WT
N711-3212	12'	EA	4,700 lbs.	12 lbs.
N711-11ALH	10'	PR	4,700 lbs.	22 lbs.



G70 GRADE 70 BINDER SAFETY CHAINS

5/16" Chain with Clevis Grab Hooks

PART #	LENGTH	UNIT	WLL	WT
11A-516G710	10'	EA	4,700 lbs.	12 lbs.
11A-516G715	15'	EA	4,700 lbs.	16 lbs.
11A-516G720	20'	EA	4,700 lbs.	21 lbs.



G70 5/16" Chain with Grab Hook On One End; Heavy Duty Latched Sling Hook On Other End

PART #	LENGTH	UNIT	WLL	WT
N711-3213	12'	EA	4,700 lbs.	13 lbs.

3/8" Chain with Clevis Grab Hooks

PART #	LENGTH	UNIT	WLL	WT
11A-38G710	10'	EA	6,600 lbs.	16 lbs.
11A-38G715	15'	EA	6,600 lbs.	22 lbs.
11A-38G720	20'	EA	6,600 lbs.	29 lbs.

1/2" Chain with Clevis Grab Hooks

PART #	LENGTH	UNIT	WLL	WT
11A-12G710	10'	EA	11,300 lbs.	28 lbs.
11A-12G715	15'	EA	11,300 lbs.	39 lbs.
11A-12G720	20'	EA	11,300 lbs.	50 lbs.



R, T & Mini J Hook Cluster on Oblong

PART #	UNIT	WLL	WT
11-7CL	EA	4,700 lbs.	3 lbs.

Pear Link with Two Grab Hooks

PART #	N711-8E
UNIT:	EA
WLL:	4,700 lbs. straight pull 5,400 lbs. at 60°
WT:	3 lbs.






**8" Forged
Clevis J Hook**

PART # N711-10CL
UNIT: EA
WLL: 5,400 lbs
WT: 4 lbs.




**15" Forged
Clevis J Hook**

PART # N711-2CL
UNIT: EA
WLL: 5,400 lbs.
WT: 4 lbs.

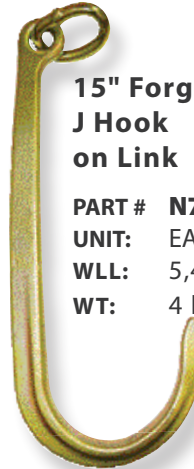

**15" Forged
J Hook
on Link**

PART # N711-2-L
UNIT: EA
WLL: 5,400 lbs.
WT: 4 lbs.

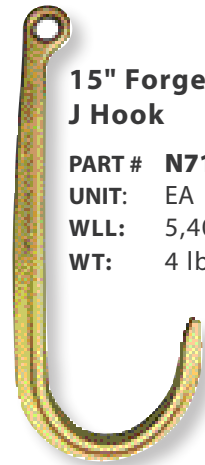

**15" Forged
J Hook**

PART # N711-2
UNIT: EA
WLL: 5,400 lbs.
WT: 4 lbs.



5/16" Oblong Link

PART # N711-OBLONG
UNIT: EA
WLL: 4,700 lbs.
WT: 1 lb.



Mini J Hook

PART # 11-7J
UNIT: EA
WLL: 4,700 lbs.
WT: 1 lb.



G70 Weldable Grab Hook

PART #	SIZE	WLL	WT
11-516WGH	5/16"	4,700 lbs.	1 lb.
11-38WGH	3/8"	6,600 lbs.	1 lb.
11-12WGH	1/2"	11,300 lbs.	2 lbs.
11-58WGH	5/8"	15,800 lbs.	4 lbs.

UNIT: EA



**Mini J Hook
on Link**

PART # 11-7J-L
UNIT: EA
WLL: 4,700 lbs.
WT: 1 lb.



**G70 Clevis Slip Hook
with Latch**

PART #	SIZE	WLL	WT
11-516G7SHL	5/16"	4,700 lbs.	1 lb.
11-38G7SHL	3/8"	6,600 lbs.	2 lbs.
11-12G7SHL	1/2"	11,300 lbs.	4 lbs.

UNIT: EA

B/A EXCLUSIVE



Patented Twist Lock™ Slip Hook

- Strongest latch ever designed for use on a slip hook.
- Eliminates out of service equipment because of broken flip latches.
- Latch is constructed of heavy gauge steel and designed to withstand adverse conditions.
- Latch conveniently swivels 360 degrees.
- Help to prevent accidental hooking or catching onto other objects.
- Available in 5/16", 3/8" and 1/2" sizes for use with Grade 70 chain.



PART #	SIZE	WLL	WT
G7-205-516	5/16"	4,700 lbs.	2 lbs.
G7-205-38	3/8"	6,600 lbs.	2 lbs.
G7-205-12	1/2"	11,300 lbs.	4 lbs.

UNIT: EA



**G70****Clevis Grab Hook**

PART #	SIZE	WLL	WT
11-516G7H	5/16"	4,700 lbs.	1 lb.
11-38G7H	3/8"	6,600 lbs.	2 lbs.
11-12G7H	1/2"	11,300 lbs.	3 lbs.

UNIT: EA

**G80** Patented Twist Lock™
Clevis Grab Hook**B/A EXCLUSIVE**

PART #	SIZE	WLL	WT
G8-200-14	1/4"	3,500 lbs.	1 lb.
G8-200-516	5/16"	4,500 lbs.	1 lb.
G8-200-38	3/8"	7,100 lbs.	2 lbs.
G8-200-12	1/2"	12,000 lbs.	3 lbs.
G8-200-58	5/8"	18,100 lbs.	5 lbs.

UNIT: EA

**G80****Clevis Grab Hook**

PART #	SIZE	WLL	WT
G8-14H	1/4"	3,500 lbs.	1 lb.
G8-516H	5/16"	4,500 lbs.	1 lb.
G8-38H	3/8"	7,100 lbs.	2 lbs.
G8-12H	1/2"	12,000 lbs.	3 lbs.
G8-58H	5/8"	18,100 lbs.	5 lbs.

**This style hook not for overhead lifting.*

UNIT: EA

**G80****Coupling Link**

PART #	SIZE	WLL	WT
G8-103-516	1/4-5/16"	4,500 lbs.	1 lb.
G8-103-38	3/8"	7,100 lbs.	1 lb.
G8-103-12	1/2"	12,000 lbs.	2 lbs.
G8-103-58	5/8"	18,100 lbs.	3 lbs.

UNIT: EA

GrabIQ™**B/A NOW OFFERING GrabIQ!**

- BUILT-IN SHORTENING POCKETS FOR EACH LEG
- REDUCED SLING WEIGHT
- FEWER BEARING POINTS FOR REDUCED WEAR AND INCREASED SLING LIFE



Cradle Hook



Non-Cradle Grab Hook



Foundry Hook



Sling Hook

Twist Lock™ Non-Cradle
Grab HookTwist Lock™ Cradle
Grab Hook**STOCKED IN 6 POPULAR HOOK STYLES**



Ratchet Load Binder

PART #	FITS CHAIN SIZE	UNIT	WLL	WT
11-RTLB-14	3/16"-1/4"	EA	2,600 lbs.	4 lbs.
11-RTLB-3	5/16"-3/8"	EA	6,600 lbs.	11 lbs.
11-RTLB-4	5/16"-3/8"	EA	8,800 lbs.	13 lbs.
11-RTLB-1	3/8"-1/2"	EA	9,200 lbs.	12 lbs.
11-RTLB-12	3/8"-1/2"	EA	12,000 lbs.	14 lbs.
11-DRX15	3/8"	EA	15,000 lbs.	15 lbs.
11-RTLB-2	1/2"-5/8"	EA	13,000 lbs.	16 lbs.
11-RTLB-8	1/2"-5/8"	EA	16,000 lbs.	16 lbs.
11-RTLB-9	5/8"-3/4"	EA	18,100 lbs.	31 lbs.



QuikBinder™ Plus

The 3-position pawl offers the user a choice of ratchet extension, ratchet take-up or a "free spin" setting for fast adjustment in either direction. A load can be secured in half the time. Features a vinyl coated barrel for a strong, comfortable grip and a lockable handle.

PART #	FITS CHAIN SIZE	UNIT	WLL	WT
11-QBDR7100	5/16"-3/8"	EA	7,100 lbs.	12 lbs.
11-QBDR12	3/8"-1/2"	EA	12,100 lbs.	14 lbs.
11-QBDR18	1/2"-5/8"	EA	18,100 lbs.	18 lbs.



Carbon Screw Pin Anchor Shackles

PART #	SIZE	UNIT	WLL	WT
11-14SPAS	1/4"	EA	1/2 Ton	1 lb.
11-516SPAS	5/16"	EA	3/4 Ton	1 lb.
11-38SPAS	3/8"	EA	1 Ton	1 lb.
11-716SPAS	7/16"	EA	1.5 Tons	1 lb.
11-12SPAS	1/2"	EA	2 Tons	1 lb.
11-58SPAS	5/8"	EA	3.25 Tons	2 lbs.
11-34SPAS	3/4"	EA	4.75 Ton	3 lbs.
11-78SPAS	7/8"	EA	6.5 Tons	4 lbs.
11-1SPAS	1"	EA	8.5 Tons	6 lbs.
11-118SPAS	1-1/8"	EA	9.5 Tons	8 lbs.
11-125SPAS	1-1/4"	EA	12 Tons	10 lbs.
11-138SPAS	1-3/8"	EA	13.5 Tons	13 lbs.
11-150SPAS	1-1/2"	EA	17 Tons	18 lbs.
11-175SPAS	1-3/4"	EA	25 Tons	28 lbs.
11-2SPAS	2"	EA	35 Tons	43 lbs.

G70



Grade 70 Bulk Chain

Transport chain is produced from heat treated carbon steel. It is the standard for towing, logging and tie-down applications. Yellow Zinc Plated for easy identification. Meets DOT specifications.

**Not Approved For Overhead Lifting.*

Grade 70 Yellow Zinc Plated Chain*

PART #	SIZE	UNIT	WLL	WT
11-14G7	1/4"	FT	3,150 lbs.	1 lb.
11-516G7	5/16"	FT	4,700 lbs.	2 lbs.
11-38G7	3/8"	FT	6,600 lbs.	2 lbs.
11-12G7	1/2"	FT	11,300 lbs.	3 lbs.
11-58G7	5/8"	FT	15,800 lbs.	4 lbs.

** Not For Recovery*



B/A B/A Polyester Classic Webbing

Our quality Classic Webbing has been chosen as the Tower's workhorse strap for decades and has become the standard for everyday use in the towing industry.

TE B/A Tower's Edge™ Webbing

Web is PVB impregnated to give maximum protection against the elements, resisting water and other fluids up to 50% more than standard web.

A modified acrylic web coating provides further protection from the elements and a more durable permanent finish. We have also chosen a slightly tighter weave for this webbing adding increased flexibility and tear resistance.

BEST AVAILABLE EDGE PROTECTION FOR EXTREME RESISTANCE WITH BLACK THERMOPLASTIC COATED POLYMER YARNS.

HD B/A Heavy Duty Webbing (B.A.H.D.)

Feel the difference with this **HEAVY DUTY WEBBING**. Over 50% more Fibers than our Classic webbing! The added benefits for this thicker, heavier design is longevity, durability and superior abrasion resistance.

OUR KITS ARE AVAILABLE IN ANY LENGTH, STYLE AND CONFIGURATION.

Just call us with your requirements and it's as good as done. **800.327.3301**



B/A STORAGE BAG

Also Sold Separately

PART #	UNIT	WT
BAG-BA1	EA	1 lbs.

ORIGINAL

Roll Back Tie-Down System with Chain Ends

4 Each: Long Strap with Chain, Short Strap with Lined Eyes & Ratchet with Chain + Carrier Bag



	PART #	DESCRIPTION	UNIT	WT
B/A	38-200C	Kit w/14' Long Straps	KIT	25 lbs.
B/A	38-218C	Kit w/18' Long Straps	KIT	27 lbs.
TE	V38-200C	Kit w/14' Long Straps	KIT	25 lbs.
TE	V38-218C	Kit w/18' Long Straps	KIT	27 lbs.
HD	39-200C	Kit w/14' Long Straps	KIT	27 lbs.
HD	39-218C	Kit w/18' Long Straps	KIT	30 lbs.

**Short Straps Also Available In D Ring Style*



Soft Tie-Down Kit with Axle Straps

4 Each: 36" Axle Straps with sleeve, Chain Ratchets, 8' Twist Snap Hook Straps, Velcro Fleece Sleeves + 1 Carrier Bag

	PART #	UNIT	WT
B/A	38-KITA36	KIT	23 lbs.
TE	V38-KITA36	KIT	26 lbs.
HD	39-KITA36	KIT	27 lbs.

NEW

Allstate Roadside Services Towing Starter Kit

This kit provides the tow operator with the tools to load and secure most high end vehicles equipped with a tow eye attaching point.

PART # AR-KIT1

DESCRIPTION: Kit includes one 2' **purple lead strap** (38-RSP-2), one catch strap shown on lead strap (38-AS1), set of 4 wreckmaster neon green interlocking skates (48-WSN), one patented 8-Point Tie-Down Kit with Chain Ends (shown above 38-218C), two 22" heavy duty carry bags with zipper (BAG-BA1).

UNIT: KIT

Kit Components Also Available Individually



**We design with
you in mind!**

Our team at B/A Products designed all V-Straps with reinforced cordura eyes for maximum resistance to tears, cuts and abrasions. Now your V-Strap will last even longer.



V-Strap with R, T & Mini J Hook Clusters

B/A

CLASSIC WEBBING

PART #	LENGTH	WT
N711-8CLU	24" Legs	9 lbs.
N711-8CLU30	30" Legs	9 lbs.
N711-8CLU36	36" Legs	9 lbs.
N711-8CLU72	72" Legs	11 lbs.

WLL: 5,400 lbs. at 60°

UNIT: EA


TE

TOWER'S EDGE™

PART #	LENGTH	WT
V11-8CLU	24" Legs	9 lbs.
V11-8CLU30	30" Legs	9 lbs.
V11-8CLU36	36" Legs	9 lbs.
V11-8CLU72	72" Legs	11 lbs.

WLL: 5,400 lbs. at 60°

UNIT: EA

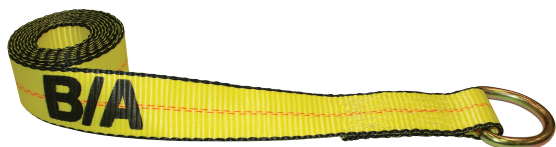

2" Wheel Lift Strap with D-Ring

PART #	LENGTH	UNIT	WLL	WT
B/A 38-1	8'	EA	3,330 lbs.	1 lb.
TE V38-1	8'	EA	3,330 lbs.	1 lb.
HD 39-1	8'	EA	3,330 lbs.	2 lbs.

B/A Also Stocks: **7', 9', 10', 12' & 14'**
Lengths for your convenience.




2" Wheel Lift Strap with Flat Snap Hook & Cordura Sleeve *Commonly used on Dynamic® Tow Trucks*

PART #	LENGTH	UNIT	WLL	WT
B/A 38-3D	8'	EA	2,000 lbs.	1 lb.
TE V38-3D	8'	EA	2,000 lbs.	2 lbs.
HD 39-3D	8'	EA	2,000 lbs.	2 lbs.



2" Wheel Lift Strap with Sewn Loop *Commonly Used on Jerr-Dan® Tow Trucks*

PART #	LENGTH	UNIT	WLL	WT
B/A 38-5	8'	EA	4,000 lbs.	1 lb.
TE V38-5	8'	EA	4,000 lbs.	1 lb.
HD 39-5	8'	EA	4,000 lbs.	1 lb.



2" Wheel Lift Strap with Grab Plate *Commonly used on Chevron® Tow Trucks*

PART #	LENGTH	UNIT	WLL	WT
B/A 38-1A	8'	EA	4,000 lbs.	1 lb.
TE V38-1A	8'	EA	4,000 lbs.	1 lb.
HD 39-1A	8'	EA	4,000 lbs.	2 lbs.



Basket Style Wheel Lift Strap 2" Flat Hook 2 Piece Quick Pick Strap *Specifically for use on Jerr-Dan® Tow Trucks*

PART #	UNIT	WLL	WT
B/A 38-JD5	EA	3,000 lbs.	2 lbs.
TE V38-JD5	EA	3,000 lbs.	2 lbs.
HD 39-JD5	EA	3,000 lbs.	2 lbs.



Basket Style Wheel Lift Strap 2" Quick Pick Strap - Old Style *Specifically for use on older Jerr-Dan® Tow Trucks*

PART #	UNIT	WLL	WT
B/A 38-JD400	EA	1,000 lbs.	2 lbs.
TE V38-JD400	EA	1,000 lbs.	2 lbs.



**All Hooks Also
Available On The
Long Handle
Ratchet** 

Webbing

B/A STAPLE PRODUCTS


2" Long Handle Ratchet

PART #	UNIT	WLL	WT
38-70	EA	4,000 lbs.	3 lbs.




2" Ratchet

PART #	UNIT	WLL	WT
38-10	EA	4,000 lbs.	3 lbs.




2" Wide Handle Ratchet

PART #	UNIT	WLL	WT
38-20	EA	4,000 lbs.	2 lbs.



2" Ratchet with Finger Hook

PART #	UNIT	WLL	WT
38-10A	EA	1,000 lbs.	3 lbs.




Single Finger Hook

PART #	UNIT	WLL	WT
38-10A-H	EA	1,000 lbs.	1 lb.




2" Wide Handle Ratchet with Finger Hook

PART #	UNIT	WLL	WT
38-20A	EA	1,000 lbs.	3 lbs.



2" Ratchet with Bent Finger Hook

PART #	UNIT	WLL	WT
38-10F	EA	2,000 lbs.	3 lbs.



Bent Finger Hook

PART #	UNIT	WLL	WT
38-10F-H	EA	2,000 lbs.	1 lb.



2" Wide Handle Ratchet with Bent Finger Hook

PART #	UNIT	WLL	WT
38-20F	EA	2,000 lbs.	3 lbs.



2" Ratchet with Forged Finger Hook

PART #	UNIT	WLL	WT
38-17	EA	2,570 lbs.	3 lbs.




Forged Finger Hook

PART #	UNIT	WLL	WT
38-17-H	EA	2,570 lbs.	1 lb.




2" Wide Handle Ratchet with Forged Finger Hook

PART #	UNIT	WLL	WT
38-27	EA	2,570 lbs.	3 lbs.



2" Ratchet with Snap Hook

PART #	UNIT	WLL	WT
38-12	EA	2,000 lbs.	3 lbs.




Snap Hook With Spacers

PART #	UNIT	WLL	WT
38-12-H	EA	2,000 lbs.	1 lb.




2" Wide Handle Ratchet with Snap Hook

PART #	UNIT	WLL	WT
38-22D	EA	2,000 lbs.	3 lbs.



2" Wide Handle Ratchet with Chain & Clevis Grab Hook

PART #	UNIT	WLL	WT
38-100-RG	EA	4,000 lbs.	5 lbs.

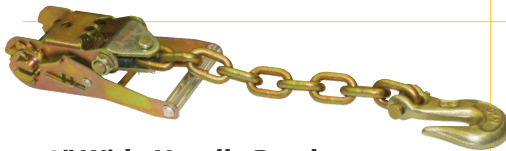

Chain with U-Bracket & Pins

PART #	UNIT	WLL	WT
38-100R-H	EA	3,670 lbs.	2 lbs.






2" Wide Handle Ratchet with Chain

PART #	UNIT	WLL	WT
38-100-R	EA	4,000 lbs.	4 lbs.



2" Ratchet Chain & Cluster Tie-Down with Mini J, R & T Hooks

	PART #	LENGTH	UNIT	WLL	WT
	38-100	8'	EA	4,000 lbs.	7 lbs.
	V38-100	8'	EA	4,000 lbs.	7 lbs.
	39-100	8'	EA	4,000 lbs.	8 lbs.



All Straps are made with Heavy Duty Polyester and have lined eyes for Superior Wear Protection



**1, 2 & 3 Ply
Recovery Straps**



**2-Ply Recovery Strap
With Sewn On Protective Cover**



Custom Lengths Also Available

Recovery Straps come in the following standard lengths: 12' 14' 16' 20' 26' 30'

1-PLY: Fill in the ★ with your desired length:

PART #	WIDTH	EYE WIDTH	WORK LOAD LIMITS		
			VERTICAL	CHOKER	BASKET
9-4/ <u> ★ </u>	4"	2"	6,400 lbs.	5,000 lbs.	12,800 lbs.
9-6/ <u> ★ </u>	6"	3"	9,600 lbs.	7,700 lbs.	19,200 lbs.
9-8/ <u> ★ </u>	8"	4"	12,800 lbs.	10,200 lbs.	25,600 lbs.
9-10/ <u> ★ </u>	10"	5"	16,000 lbs.	12,800 lbs.	32,000 lbs.
9-12/ <u> ★ </u>	12"	6"	19,200 lbs.	15,400 lbs.	38,400 lbs.

2-PLY: Fill in the ★ with your desired length:

PART #	WIDTH	EYE WIDTH	VERTICAL	CHOKER	BASKET
9-2P4/ <u> ★ </u>	4"	2"	11,500 lbs.	9,200 lbs.	23,000 lbs.
9-2P6/ <u> ★ </u>	6"	3"	16,300 lbs.	13,000 lbs.	32,600 lbs.
9-2P8/ <u> ★ </u>	8"	4"	19,200 lbs.	15,400 lbs.	38,400 lbs.
9-2P10/ <u> ★ </u>	10"	5"	22,400 lbs.	17,900 lbs.	44,800 lbs.
9-2P12/ <u> ★ </u>	12"	6"	26,900 lbs.	21,500 lbs.	53,800 lbs.

2-PLY WITH PROTECTIVE SEWN COVER: Fill in the ★ with your desired length:

PART #	WIDTH	EYE WIDTH	VERTICAL	CHOKER	BASKET
9-DC6/ <u> ★ </u>	6"	3"	16,300 lbs.	13,000 lbs.	32,600 lbs.
9-DC8/ <u> ★ </u>	8"	4"	19,200 lbs.	15,400 lbs.	38,400 lbs.
9-DC10/ <u> ★ </u>	10"	5"	22,400 lbs.	17,900 lbs.	44,800 lbs.
9-DC12/ <u> ★ </u>	12"	6"	26,900 lbs.	21,500 lbs.	53,800 lbs.


3-PLY: Fill in the ★ with your desired length:

PART #	WIDTH	EYE WIDTH	VERTICAL	CHOKER	BASKET
9-3P6/ <u> ★ </u>	6"	3"	23,000 lbs.	18,400 lbs.	46,000 lbs.
9-3P8/ <u> ★ </u>	8"	4"	30,700 lbs.	24,500 lbs.	61,400 lbs.
9-3P10/ <u> ★ </u>	10"	5"	36,800 lbs.	29,400 lbs.	73,600 lbs.
9-3P12/ <u> ★ </u>	12"	6"	44,000 lbs.	35,200 lbs.	88,000 lbs.



Lifting Straps

Working Load Limit Diagram for Recovery Straps, Flat Eye & Twist Eye Lifting Straps.

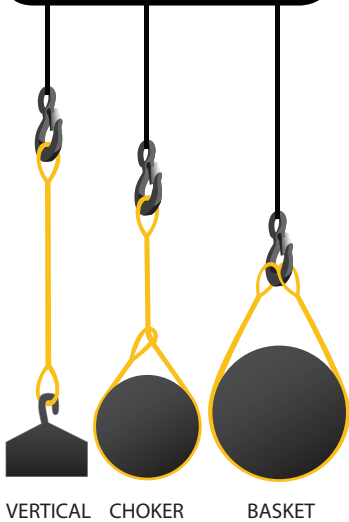

VERTICAL CHOKER BASKET

Our Lifting Straps come in the following standard lengths:

4' 6' 8' 10' 12' 14' 16' & 20'

Custom Lengths Also Available

1-PLY: Fill in the with your desired length:

PART #	WIDTH	WORK LOAD LIMITS		
		VERTICAL	CHOKER	BASKET
9-1FE1P *	1"	1,600 lbs.	1,280 lbs.	3,200 lbs.
9-2FE1P *	2"	3,200 lbs.	2,500 lbs.	6,400 lbs.
9-3FE1P *	3"	4,800 lbs.	3,800 lbs.	9,600 lbs.
9-4FE1P *	4"	6,400 lbs.	5,000 lbs.	12,800 lbs.


2-PLY: Fill in the with your desired length:

PART #	WIDTH	VERTICAL	CHOKER	BASKET
9-1FE2P *	1"	3,200 lbs.	2,500 lbs.	6,400 lbs.
9-2FE2P *	2"	6,400 lbs.	5,000 lbs.	12,800 lbs.
9-3FE2P *	3"	8,800 lbs.	7,040 lbs.	17,600 lbs.
9-4FE2P *	4"	11,500 lbs.	9,200 lbs.	23,000 lbs.



Flat Eye Sling

Endless Loop Lifting Strap Working Load Limit Diagram

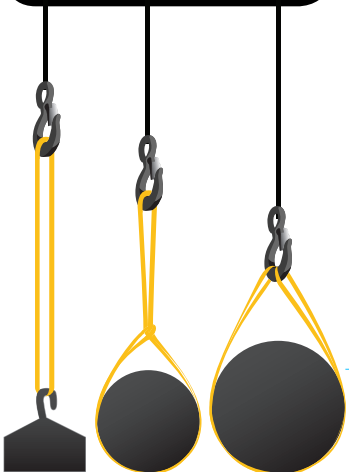

ENDLESS VERTICAL ENDLESS CHOKER ENDLESS BASKET

1-PLY: Fill in the with your desired length:

PART #	WIDTH	VERTICAL	CHOKER	BASKET
9-1TE1P *	1"	1,600 lbs.	1,280 lbs.	3,200 lbs.
9-2TE1P *	2"	3,200 lbs.	2,500 lbs.	6,400 lbs.
9-3TE1P *	3"	4,800 lbs.	3,800 lbs.	9,600 lbs.
9-4TE1P *	4"	6,400 lbs.	5,000 lbs.	12,800 lbs.

2-PLY: Fill in the with your desired length:

PART #	WIDTH	VERTICAL	CHOKER	BASKET
9-1TE2P *	1"	3,200 lbs.	2,500 lbs.	6,400 lbs.
9-2TE2P *	2"	6,400 lbs.	5,000 lbs.	12,800 lbs.
9-3TE2P *	3"	8,800 lbs.	7,040 lbs.	17,600 lbs.
9-4TE2P *	4"	11,500 lbs.	9,200 lbs.	23,000 lbs.




Twist Eye Sling

1-PLY: Fill in the with your desired length:

PART #	WIDTH	VERTICAL	CHOKER	BASKET
9-1EL1P *	1"	3,200 lbs.	2,500 lbs.	6,400 lbs.
9-2EL1P *	2"	6,400 lbs.	5,000 lbs.	12,800 lbs.
9-3EL1P *	3"	8,600 lbs.	6,900 lbs.	17,200 lbs.
9-4EL1P *	4"	11,500 lbs.	9,200 lbs.	23,000 lbs.

2-PLY: Fill in the with your desired length:

PART #	WIDTH	VERTICAL WLL	CHOKER WLL	BASKET WLL
9-1EL2P *	1"	6,200 lbs.	4,900 lbs.	12,400 lbs.
9-2EL2P *	2"	12,400 lbs.	9,900 lbs.	24,800 lbs.
9-3EL2P *	3"	16,300 lbs.	13,000 lbs.	32,600 lbs.
9-4EL2P *	4"	20,700 lbs.	16,500 lbs.	41,400 lbs.

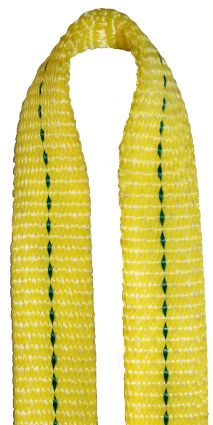

Endless Loop

The rated capacities are based on sling web with a minimum certified tensile strength of 9,800 lbs. per inch of webbing width.





Round Sling Rated Capacities

Round slings are color coded for the different capacities to be more convenient when you need to make a fast decision on the job.

● Fill in the with your desired length: **2' 3' 4' 6' 8' 10' 12'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-RSP- <input type="text"/>	2,600 lbs.	2,100 lbs.	5,200 lbs.

● Fill in the with your desired length: **3' 4' 6' 8' 10' 12'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-RSG- <input type="text"/>	5,300 lbs.	4,200 lbs.	10,600 lbs.

● Fill in the with your desired length: **3' 4' 6' 8' 10' 12' 20'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-RSY- <input type="text"/>	8,400 lbs.	6,700 lbs.	16,800 lbs.

● Fill in the with your desired length: **4' 6' 8' 10' 12' 20'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-RSR- <input type="text"/>	13,200 lbs.	10,600 lbs.	26,400 lbs.

● Fill in the with your desired length: **6' 8' 10' 12' 16' 20'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-RSB- <input type="text"/>	21,200 lbs.	17,000 lbs.	42,400 lbs.

● Fill in the with your desired length: **8' 10' 12' 16' 20'**

PART #	VERTICAL WLL	CHOKER WLL	BASKET WLL
38-ENR10- <input type="text"/>	40,000 lbs.	32,000 lbs.	80,000 lbs.



OTHER LENGTHS AVAILABLE BY SPECIAL ORDER



Grade 100 Web Sling Hook

PART #	SIZE	WLL	WT
G10-181-1	1 Ton	2,200 lbs.	2 lbs.
G10-181-2	2 Ton	4,400 lbs.	4 lbs.
G10-181-3	3 Ton	6,600 lbs.	6 lbs.
G10-181-5	5 Ton	11,000 lbs.	8 lbs.

UNIT: EA



Round Sling Hooks

PART #	WLL	WT
● 38-RSH-P	2,600 lbs.	2 lbs.
● 38-RSH-G	5,300 lbs.	3 lbs.
● 38-RSH-Y	8,400 lbs.	5 lbs.
● 38-RSH-R	13,200 lbs.	10 lbs.

UNIT: EA



Grade 100 Round Sling Self-Locking Hook

PART #	SIZE	WLL
G10-183-516	1/4"-5/16"	5,700 lbs.
G10-183-38	3/8"	8,800 lbs.
G10-183-12	1/2"	15,000 lbs.
G10-183-58	5/8"	22,600 lbs.
G10-183-34	3/4"	35,300 lbs.

UNIT: EA



Grade 100 Web Sling Connector Easily Connect Chain and Round Slings

PART #	SIZE	WLL	WT
G10-185-516	1/4"-5/16"	5,700 lbs.	1 lb.
G10-185-38	3/8"	8,800 lbs.	2 lbs.
G10-185-12	1/2"	15,000 lbs.	3 lbs.
G10-185-58	5/8"	22,600 lbs.	5 lbs.
G10-185-34	3/4"	35,300 lbs.	8 lbs.

UNIT: EA





Synthetic Super Slings **NEW**

The Synthetic Super Sling was designed for those hard to reach tight spots where the round sling or chain won't work. These slings also work great when you have aluminum rims with small holes that could get damaged by using chain.

Synthetic Super Slings are super strong, versatile and are offered in 4 sizes to suit your individual needs. Available in Eye and Eye style or Endless Loop style. Each sling features a full length floating (not sewn) protective sleeve that not only provides protection against damage and wear, but also allows for safety inspections of the rope underneath.



	SIZE	TYPE	VERTICAL	BASKET	CHOKER
●	3/8"	Eye & Eye	3,500 lbs.	7,000 lbs.	2,975 lbs.
●	3/8"	Endless	7,020 lbs.	14,040 lbs.	5,970 lbs.
●	1/2"	Eye & Eye	6,120 lbs.	12,240 lbs.	5,200 lbs.
●	1/2"	Endless	12,240 lbs.	24,480 lbs.	10,400 lbs.
●	5/8"	Eye & Eye	9,450 lbs.	18,900 lbs.	8,030 lbs.
●	5/8"	Endless	18,900 lbs.	37,800 lbs.	16,065 lbs.
●	3/4"	Eye & Eye	11,880 lbs.	23,760 lbs.	10,100 lbs.
●	3/4"	Endless	23,760 lbs.	47,520 lbs.	20,200 lbs.

GUARDIAN ANGLE **NEW**

The Guardian Angle™ Provides:

Reinforcement to the corners of trailer or box trucks when uprighting over turns with synthetic web slings (flat or round).

A smooth surface for synthetic web slings to contact and slide allowing the strap to "find home" when tension is applied reducing the possibility of the strap catching on the 90 degree edge of your typical aluminum angle and rolling it away from the trailer. The rounded edge also helps to eliminate cut and torn straps.

Aluminum construction is light weight and non-sparking.

The large radius of the outer tube spreads the load per square inch transmitted to the strap over a larger surface area, which allows the straps to more closely reach their Minimum Break Strength and Work Load Limit.

6" x 6" angle fits over corners better than 3"x 4" or 3.5" x 5" angles.


Safety Catch Strap and ratchet included, to keep angle from falling and causing property damage or injury.



Safety Catch Strap also doubles as a carry handle.

PART #	DESCRIPTION
45-3A24	24" Guardian Angle™ w/Catch Strap
45-3B42	42" Guardian Angle™ w/Catch Strap
45-3R6	1" x 72" Catch Strap for 45-3A24
45-3R8	1" x 96" Catch Strap for 45-3B42



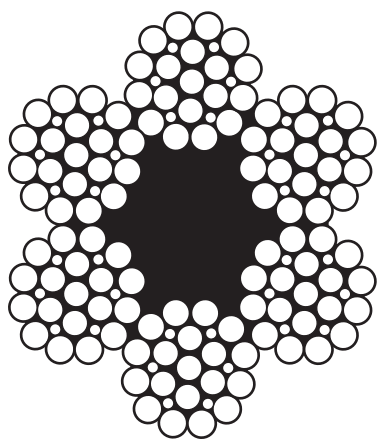

6 X 25

Extra Improved
Plow Steel
Construction

FIBER CORE

WIRE ROPE ASSEMBLIES



Chain Gang Lubricant

LONG LASTING • WATER RESISTANT

Reduces friction and wear, eliminates corrosion, able to withstand extreme temperatures, **water resistant**. Sold in cases of 12 Aerosol Cans only.

PART #

BA-LUBE

UNIT

CASE



Replacement Latch Kits

PART #

4-2TL

UNIT

EA

TO FIT HOOKS

3 Ton Alloy/ 2T Carbon

4-3TL

EA

4.5 Tons Alloy/ 3T Carbon

4-5TL

EA

7 Tons Alloy/ 5T Carbon

4-11TL

EA

11 Tons Alloy/ 7T Carbon

■ **WIRE ROPE WINCH LINE TAGS:** The general specifications, warnings & working load limits are printed clearly on each tag for your safety and convenience. Please refer to our Specs & Usage Section at www.baproducts.com or give us a call to find out more information on our wire rope.

ALLOY STRAIGHT HOOK



WORKING LOAD LIMITS @ 3.55:1
MINIMUM BREAK STRENGTH:

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38PS50	4-716PS50	4-12PS50	4-916PS50	4-58PS50
75'	4-38PS75	4-716PS75	4-12PS75	4-916PS75	4-58PS75
100'	4-38PS100	4-716PS100	4-12PS100	4-916PS100	4-58PS100
150'	4-38PS150	4-716PS150	4-12PS150	4-916PS150	4-58PS150
200'	4-38PS200	4-716PS200	4-12PS200	4-916PS200	4-58PS200
	3,780 lbs.	5,120 lbs.	6,650 lbs.	8,390 lbs.	10,360 lbs.
	13,420 lbs.	18,200 lbs.	23,600 lbs.	29,800 lbs.	36,800 lbs.

3/8" Also offered in 55' Standard lengths

ALLOY SWIVEL HOOK



WORKING LOAD LIMITS @ 3.55:1
MINIMUM BREAK STRENGTH:

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38PS50S	4-716PS50S	4-12PS50S	4-916PS50S	4-58PS50S
75'	4-38PS75S	4-716PS75S	4-12PS75S	4-916PS75S	4-58PS75S
100'	4-38PS100S	4-716PS100S	4-12PS100S	4-916PS100S	4-58PS100S
150'	4-38PS150S	4-716PS150S	4-12PS150S	4-916PS150S	4-58PS150S
200'	4-38PS200S	4-716PS200S	4-12PS200S	4-916PS200S	4-58PS200S
	3,780 lbs.	5,120 lbs.	6,650 lbs.	8,390 lbs.	10,360 lbs.
	13,420 lbs.	18,200 lbs.	23,600 lbs.	29,800 lbs.	36,800 lbs.


ALLOY SELF-LOCKING SWIVEL HOOK



WORKING LOAD LIMITS @ 3.55:1
MINIMUM BREAK STRENGTH:

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38PS50LH	4-716PS50LH	4-12PS50LH	4-916PS50LH	4-58PS50LH
75'	4-38PS75LH	4-716PS75LH	4-12PS75LH	4-916PS75LH	4-58PS75LH
100'	4-38PS100LH	4-716PS100LH	4-12PS100LH	4-916PS100LH	4-58PS100LH
150'	4-38PS150LH	4-716PS150LH	4-12PS150LH	4-916PS150LH	4-58PS150LH
200'	4-38PS200LH	4-716PS200LH	4-12PS200LH	4-916PS200LH	4-58PS200LH
	3,780 lbs.	5,120 lbs.	6,650 lbs.	8,390 lbs.	10,360 lbs.
	13,420 lbs.	18,200 lbs.	23,600 lbs.	29,800 lbs.	36,800 lbs.



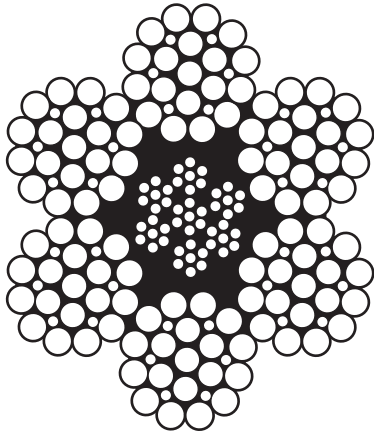


6 X 25
Extra Improved
Plow Steel
Construction

SPECS & USAGE:
For Supporting Rated Loads
*Including Boom Suspensions

The Strength Factor for live or running ropes that wind on drums or pass over sheaves shall be not less than 3.55.

Please reference Section 7 Specifications & Usage and/or see the Society of Automotive Engineers Technical Standards for more information on wire rope. Spec: ASME/ANSI B30.5. Supercedes spec SAE-J959.

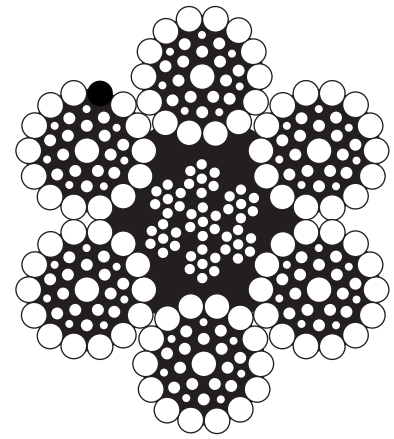

6 X 37
3/4" Extra
Improved Plow
Steel Construction

STEEL CORE WIRE ROPE ASSEMBLIES

**All B/A Wire Rope Assemblies use extra improved plow steel for superior strength & flexibility.*

ALLOY STRAIGHT HOOK

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38SC50	4-716SC50	4-12SC50	4-916SC50	4-58SC50
75'	4-38SC75	4-716SC75	4-12SC75	4-916SC75	4-58SC75
100'	4-38SC100	4-716SC100	4-12SC100	4-916SC100	4-58SC100
150'	4-38SC150	4-716SC150	4-12SC150	4-916SC150	4-58SC150
200'	4-38SC200	4-716SC200	4-12SC200	4-916SC200	4-58SC200
	4,250 lbs. 15,100 lbs.	5,740 lbs. 20,400 lbs.	7,490 lbs. 26,600 lbs.	9,520 lbs. 33,800 lbs.	11,600 lbs. 41,200 lbs.

ALLOY SWIVEL HOOK

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38SC50S	4-716SC50S	4-12SC50S	4-916SC50S	4-58SC50S
75'	4-38SC75S	4-716SC75S	4-12SC75S	4-916SC75S	4-58SC75S
100'	4-38SC100S	4-716SC100S	4-12SC100S	4-916SC100S	4-58SC100S
150'	4-38SC150S	4-716SC150S	4-12SC150S	4-916SC150S	4-58SC150S
200'	4-38SC200S	4-716SC200S	4-12SC200S	4-916SC200S	4-58SC200S
	4,250 lbs. 15,100 lbs.	5,740 lbs. 20,400 lbs.	7,490 lbs. 26,600 lbs.	9,520 lbs. 33,800 lbs.	11,600 lbs. 41,200 lbs.

ALLOY SELF-LOCKING SWIVEL HOOK

	3/8"	7/16"	1/2"	9/16"	5/8"
50'	4-38SC50LH	4-716SC50LH	4-12SC50LH	4-916SC50LH	4-58SC50LH
75'	4-38SC75LH	4-716SC75LH	4-12SC75LH	4-916SC75LH	4-58SC75LH
100'	4-38SC100LH	4-716SC100LH	4-12SC100LH	4-916SC100LH	4-58SC100LH
150'	4-38SC150LH	4-716SC150LH	4-12SC150LH	4-916SC150LH	4-58SC150LH
200'	4-38SC200LH	4-716SC200LH	4-12SC200LH	4-916SC200LH	4-58SC200LH
	4,250 lbs. 15,100 lbs.	5,740 lbs. 20,400 lbs.	7,490 lbs. 26,600 lbs.	9,520 lbs. 33,800 lbs.	11,600 lbs. 41,200 lbs.

THE ADVANTAGE OF 3/4"

3/4" Wire rope assemblies are manufactured with more strands, at 6 x 37 compared to the standard 6 x 25, providing greater flexibility for heavier loads. See the diagram above.

3/4"
4-34EI100S
4-34EI150S
4-34EI200S
4-34EI250S
4-34EI300S

16,560 lbs.
58,800 lbs.

3/4"
4-34EI100LH
4-34EI150LH
4-34EI200LH
4-34EI250LH
4-34EI300LH

16,560 lbs.
58,800 lbs.



SKOOKUM®

BLOCKS AND RIGGING

Guaranteed Tough Since 1890

The future is here! The new Skookum 15 Ton lightweight block is the culmination of over 2 years of research and development between Skookum and B/A Products. This block is the first major redesign of the snatch block since they were patented back in 1945!

40% Lighter Than Standard Style Snatch Blocks!



- Lightweight - less than 44 lbs. for a 15 Ton Block!
- For use with 3/4" - 7/8" Wire or Synthetic Rope
- Latched Forged Swivel Hook comes as standard equipment
- Innovative lightweight hook combines a custom high strength alloy with a low profile design, creating a tremendous weight to strength ratio
- 4:1 Design Factor
- Lightweight composite sheave is made with a material blend that is specifically designed for increased strength and durability
- Should any marring of the sheave tread occur, the composite material will cause NO abrasion on the wire rope, unlike traditional alloy sheave materials
- ASME B30.26 Compliant

PART #	SHEAVE	FITS	UNIT	WLL	PKG WT
	SIZE	ROPE SIZE			
6K-6T6A	6"	3/8" to 1/2"	EA	6 Tons	19 lbs.
6K-10T6A	6"	5/8" to 3/4"	EA	10 Tons	29 lbs.
6K-10T8A	8"	5/8" to 3/4"	EA	10 Tons	33 lbs.
6K-15T10A	10"	3/4" to 7/8"	EA	15 Tons	46 lbs.



B/A Snatch Blocks Created with the highest quality tensile steel. Bronze bushings and grease fittings allow for ease of use and extended sheave life. 100% Magnaflux tested standard on all Blocks. Supplied with model number, wire rope size, working load limit and usage warnings. Designed with a safety factor of 4:1. Test certs and batch numbers for ease of traceability.

SNATCH BLOCKS with Swivel Shackles

PART #	SHEAVE DIAMETER	FITS ROPE SIZE	WLL	WT
6Y-2T3SW	3"	5/16" to 3/8"	2 Ton	5 lbs.
6Y-4T4SW	4-1/2"	3/8" to 1/2"	4 Ton	13 lbs.
6Y-8T6SW	6"	5/8" to 3/4"	8 Ton	29 lbs.
6Y-8T8SW	8"	5/8" to 3/4"	8 Ton	43 lbs.



SNATCH BLOCKS with Swivel Hooks & Heavy Duty Latches with Pin

PART #	SHEAVE DIAMETER	FITS ROPE SIZE	WLL	WT
6Y-2T3	3"	5/16" to 3/8"	2 Ton	6 lbs.
6Y-4T4	4-1/2"	3/8" to 1/2"	4 Ton	14 lbs.
6Y-8T6	6"	5/8" to 3/4"	8 Ton	29 lbs.
6Y-8T8	8"	5/8" to 3/4"	8 Ton	45 lbs.





Snatch Blocks are used to change the direction or gain a mechanical advantage over the load being moved. All of our Snatch Blocks feature bronze bushings with grease fittings. Easy opening side plates open without coming apart.

SNATCH BLOCKS

with Latched Swivel Hooks

PART #	SHEAVE DIAMETER	ROPE SIZE	WLL	WT
6I-2T3	3"	5/16" to 3/8"	2 Ton	6 lbs.
6I-3T3	3"	5/16" to 3/8"	3 Ton	6 lbs.
6I-4T4	4-1/2"	3/8" to 1/2"	4 Ton	14 lbs.
6I-8T6	6"	5/8" to 3/4"	8 Ton	27 lbs.
6I-8T8	8"	5/8" to 3/4"	8 Ton	36 lbs.
6I-15T8	8"	3/4" to 7/8"	15 Ton	60 lbs.
6I-15T10	10"	3/4" to 7/8"	15 Ton	75 lbs.

SNATCH BLOCKS

with Swivel Shackles

PART #	SHEAVE DIAMETER	ROPE SIZE	WLL	WT
6I-SW2T	3"	5/16" to 3/8"	2 Ton	6 lbs.
6I-SW4T	4-1/2"	3/8" to 1/2"	4 Ton	14 lbs.
6I-SW8T	6"	5/8" to 3/4"	8 Ton	28 lbs.

SNATCH BLOCKS with Swivel Shackles and 30" Chains



Swivel Shackle

With 5/16" Grade 70 Chain & Grab Hook

PART # 6I-2TSW30
SHEAVE DIAMETER: 3"
ROPE SIZE: 5/16" to 3/8"
WLL: 2 Ton
WT: 9 lbs.

Swivel Shackle

With 3/8" Grade 100 Chain & Grab Hook

PART # 6I-4TSW30
SHEAVE DIAMETER: 4-1/2"
ROPE SIZE: 3/8" to 1/2"
WLL: 4 Ton
WT: 19 lbs.

Swivel Shackle

With 5/16" Grade 70 Chain & Twist Lock™ Grab Hook

PART # 6I-2TSW30TL
SHEAVE DIAMETER: 3"
ROPE SIZE: 5/16" to 3/8"
WLL: 2 Ton
WT: 9 lbs.

Swivel Shackle

With 3/8" Grade 100 Chain & Twist Lock™ Grab Hook

PART # 6I-4TSW30TL
SHEAVE DIAMETER: 4-1/2"
ROPE SIZE: 3/8" to 1/2"
WLL: 4 Ton
WT: 19 lbs.



BallDog Plus

The newest innovation in hitch attachment.

Pear Link fits over 1-7/8", 2" and 2-5/16" Tow Balls

Large Oblong fits into 2" and 2-1/2" Receiver Tubes

Example A: Place Pear Link over tow ball and secure with supplied safety hitch pin. Securely attach 5/16" chain using our patented Twist Lock™ Safety Latch Grab Hook.

Example B: Place large oblong into receiver tube and secure with supplied safety hitch pin. Securely attach 5/16" chain using our Patented Twist Lock™ Safety Latch Grab Hook.

Example C: Place large oblong into receiver tube and secure with supplied safety hitch pin. Use a latched slip hook shackle or synthetic sling to securely connect to the pear link.

PART #	UNIT	WLL	WT
BALDOG	EA	4,700 lbs.	5 lbs.

WARNING: Never Exceed Working Load Limit.
Not to be used for the purposes of overhead lifting.



Example A



Example B



Example C


Door Tool Kit

New convenient door tool kit has all of your staple items in one package. Includes a 1"x12" Cordura sleeve for ultimate protection of the the vehicle's door jamb.

Kit Includes:

- 2 Plastic Window Wedges
- 1 Red Alert Door Tool
- 1 Inflatable Air Wedge
- 1 - 1"x12" Protective Sleeve


PART #	UNIT	WT
12-DK1	KIT	3 lbs.

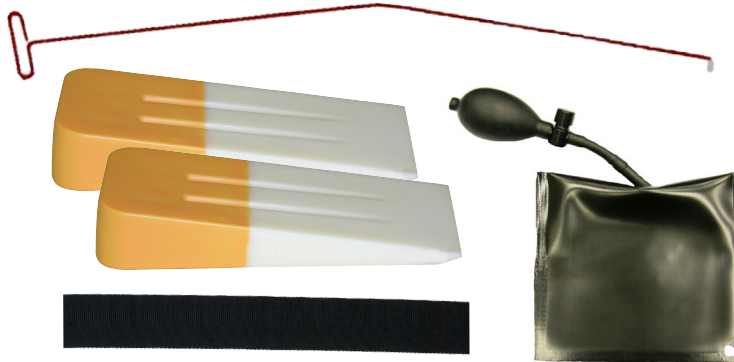

Plastic Window Wedge

Our rigid design separates the door panel from the vehicles window, allowing easy access for the door tools.

PART #	SIZE	UNIT	WT
12-W5	5.5" L x 2.5" W	EA	1 lb.

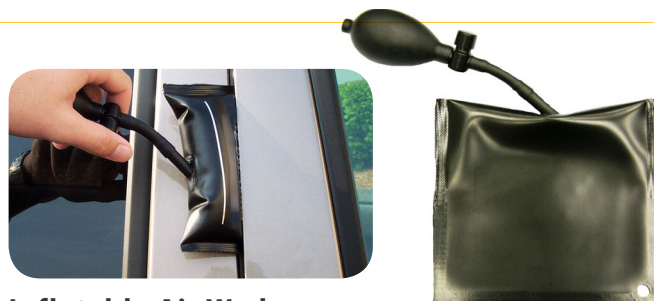


Inflatable Air Wedge

The inflatable Air Wedge carefully separates the door panel from the vehicles window, allowing easy access for long reach door tools.

PART #	UNIT	WT
12-275	EA	1 lb.



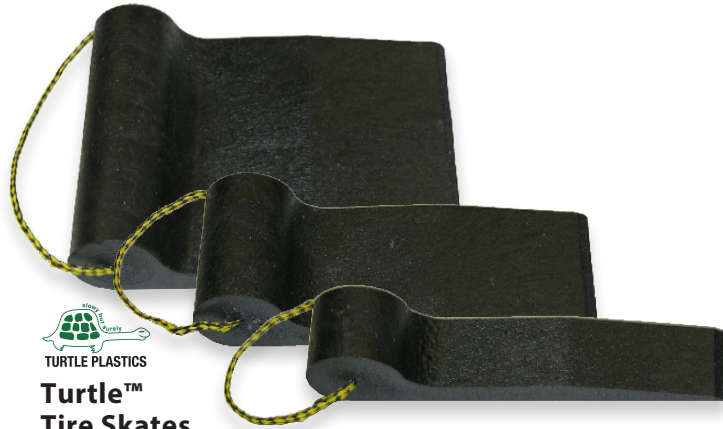

Turtle™ Tire Skates

PART #	SIZE	DESCRIPTION	UNIT
48-TS13	13"W x 17" L	Quad Tire Skate	EA
48-TS65	6.5"W x 17" L	Double Tire Skate	EA
48-TS325	3.25"W x 17" L	Single Tire Skate	EA




WreckMaster Interlocking Tire Skates

With interlocking teeth, these skates can be used in a variety of sizes to assist with any need. The center groove accommodates brake rotors when moving vehicles without wheels.

PART #	DESCRIPTION	UNIT	WT
48-WSN	Neon Green	Set of 4	8 lbs.
48-WSB	Black	Set of 4	8 lbs.

ITI Container Skates with Plug

Moving heavy objects is made easier when using Container Skates.

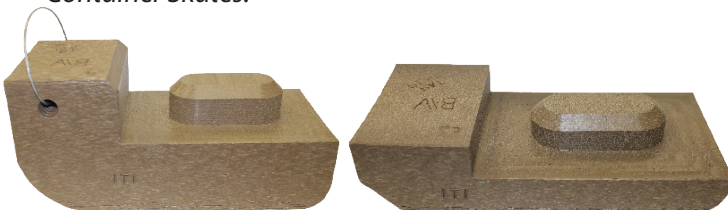

PART #	DESCRIPTION	UNIT	WT
48-CSP6	Skate with Plug	EA	7 lbs.
48-CSP5	Low Profile Skate with Plug	EA	3 lbs.

BIG OR SMALL? WE HAVE THEM ALL.

B/A Products Co. provides a wide range of Skates from several manufacturers to meet any need.



B/A Individual Tire Skates

PART #	SIZE	UNIT	WT
48-2	3.5" W x 15.75" L	EA	4 lbs.



ITI Individual Tire Skates

PART #	SIZE	UNIT	WT
48-100	3.5" W x 15.75"	EA	3 lbs.

**The rope or wire handles on all products are for handling only and are not designed to be used as an attachment or pulling point.*

ITI Control Arm Skates

Control Arm Skates make loading vehicles with missing wheels, frozen bearings and broken ball joints, control arms or axles a snap. Both ends have a radius for easy loading and unloading without having to remove and turn the skate. Works great on trailers too!



PART #	SIZE	UNIT	WT
48-CAS4	4"	EA	5 lbs.
48-CAS6	6"	EA	13 lbs.

**Extensions Also Available*



B/A STAPLE PRODUCTS

Accessories



Made of heavy-duty rubber. **Anchored eye** allows you to attach a line to keep blocks together.


Rubber Wheel Chock

PART #	5-RWC1
SIZE	6"Hx9.75"Wx8"D
UNIT	EA
WT	10 lbs.

Pro Series Toolbox

Gives you a lot of storage in a box that will fit just about anywhere. Single door handle with two rotary strikers inside of the door to keep the door closed and sealed from the weather. Comes with one oval light mounting bracket already installed. Comes predrilled for most In The Ditch accessories. (Toolbox only)

PART #	DESCRIPTION	UNIT	WT
43-D1570	70"L x 18"D x 18"T	EA	121 lbs.
43-D1548	48"L x 18"D x 18"T	EA	81 lbs.

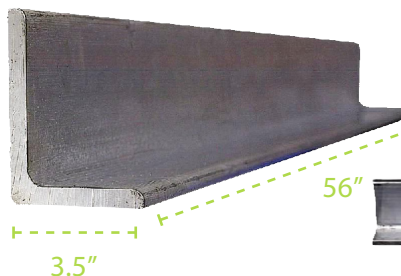

Great for protection when sling towing or for use during recoveries of trailers.

Aluminum Angle

PART #	SIZE	UNIT	WT
45-1	1/2" x 56" L	EA	22 lbs.



NEW

Curved Forged D-Rings

1" Forged Curved Steel D-Ring (with Mounting Bracket)

PART #	SIZE	UNIT	WLL	WT
38-DR355	6"x7"x12"	PR	15,580 lbs.	6 lbs.

*WLL: This D-Ring is formed at a 55° angle extending out from the mounting surface.

Aluminum Wheel Chocks

Lightweight but extremely strong, 5-1's weigh 3 lbs. each and have a crush factor of 55,000 lbs; 5-2's weigh 7 lbs. each with a crush factor of 75,000 lbs. Serrated teeth on the front and rear give double the gripping power of other blocks.



PART #	SIZE	UNIT	WT
5-1	6"x7"x12"	PR	8 lbs.
5-2	5"x8.5"x15"	PR	17 lbs.




Weld On D-Rings

PART #	SIZE	UNIT	WLL	WT
38-DR58	5/8"	EA	6,130 lbs.	2 lbs.
38-DR34	3/4"	EA	9,120 lbs.	3 lbs.
38-DR2	1"	EA	15,580 lbs.	5 lbs.

1/2" Bolt on D-Ring

PART #	DESCRIPTION	UNIT	WLL	WT
38-DR1	Plated	EA	4,080 lb.	1 lb.
38-DR1SC	Self Colored	EA	4,080 lb.	1 lb.

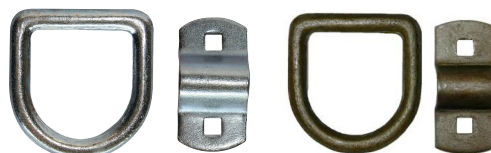



AUTO POSITIONING DOLLY

PART #	DESCRIPTION	UNIT	WLL	WT
J-1	Right Hand	EA	1,600 lbs	48 lbs.
J-1LH	Left Hand	EA	1,600 lbs	48 lbs.



Product Features & Benefits


- 1,600 lb. Maximum Load Capacity per unit (up to 6,400 lbs. with 4 units)
- 36" Maximum Tire Height
- 13" Maximum Tire Width
- Heavy duty casters allow the RediJack to roll smoothly under load.
- Easily move disabled vehicles in less time and with less effort
- **AVAILABLE IN RIGHT AND LEFT HAND MODELS**
- Will fit into most existing Auto Positioning Dolly Brackets. B/A also stocks a selection of dolly brackets for your convenience
- For effective use of this product, a minimum of 2 REDiJacks are required
- Heavy duty welded construction with an attractive electrostatic red powder coat finish



Universal Locking GoJak® Mounting Bracket

Allows you to vertically mount your GoJak®. Includes a padlock bracket.

PART #	UNIT	WT
40-GJ100	EA	7 lbs.

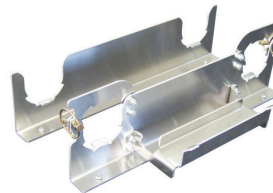

GoJak® Mounting Bracket

Allows you to mount a GoJak® to any flat surface. Holds 5211 and 6313 series GoJaks®. Easy to install and has a padlock bracket.

PART #	UNIT	WT
40-D1244	SET	7 lbs.

The GoJak® is a mechanical lift + dolly allowing 1-2 people to safely move a vehicle on a smooth level surface.

The 40-GJ5211 can lift and move wheel weights up to 1,300 lbs (up to 5,200 lbs with four units) and tires up to 11" wide and 34" tall. The 40-GJ6313 can lift and move wheel weights up to 1,574 lbs (up to 6,300 lbs with four units) and tires up to 13" wide and 36" tall. Both feature heavy duty welded construction, heavy duty industrial casters and wheels and a powder coat finish.

GoJak®

PART #	DESCRIPTION	UNIT	WT
40-GJ5211	GoJak® 5211	EA	40 lbs.
40-GJ5211LH	GoJak® 5211 Left Hand	EA	40 lbs.
40-GJ6313	GoJak® 6313	EA	47 lbs.
40-GJ6313LH	GoJak® 6313 Left Hand	EA	47 lbs.



**Collins
Dollies**



All New Collins SLZ High-Speed® Dolly Features and Benefits:


- Safety ratchet system to help prevent accidents
- Load bearing pivot points run through the dolly body, and welded end caps for added strength
- Critical dolly parts laser cut for extra precision
- Release handle now runs full length for greater strength
- **Two-tone zinc plating standard on all steel components for improved resistance to salt corrosion and winter chemicals**
- Rail ends are single-piece construction
- Most serviceable dolly around - easily replace components on the spot
- Recessed bolt heads are flush with the dolly surface for a more attractive finish
- Grease fittings are protected on the inside of the dolly body
- Laser-Scribed for easy identification



Twistlock Plungers


Plunger and Spring Design is easier and more reliable to use than the old style locking pins. Allows for one hand operation to open the assembly and put it into the automatic locking position. Pin will fully engage once the holes in your bar line up. Used on sling arms, stabilizer legs, wheel lift forks and more.

PART #	SIZE	A	B	C	UNIT	WT
16-CL12	1/2"	1/2"	2.57"	.98"	EA	1 lb.
16-CL58	5/8"	5/8"	2.989"	1.18"	EA	1 lb.
16-CL34	3/4"	3/4"	2.989"	1.18"	EA	1 lb.
16-CL1	1"	1"	3.66"	1.38"	EA	2 lbs.

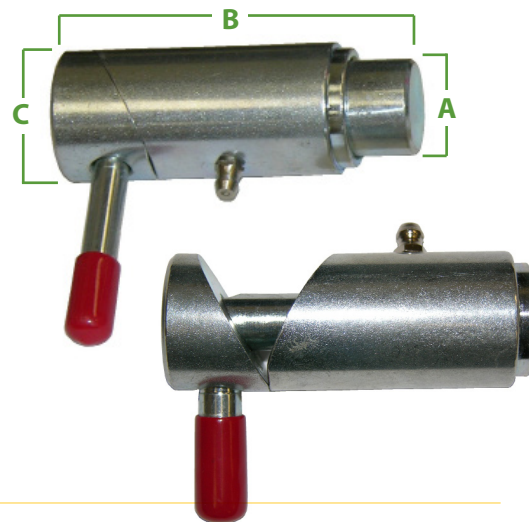

Dolly Mounts

Great low cost way to store your dolly. Lock by running a padlock through the eyelet on top of mount after dolly is placed in the mount. Tuff Coat Black finish. Sold As Each. Padlock not included.

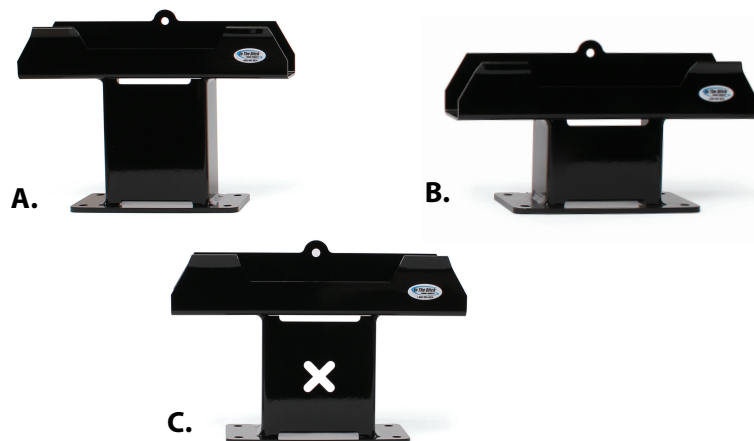

A. Standard Simple Mount

Fits the Speed® Dolly Only

PART #	SIZE	WT
40-D1352	9.5" H	7 lbs.

B. Short Simple Mount

Allows the tires of the dolly to rest on the deck. Fits the Speed® Dolly only.

PART #	SIZE	WT
40-D1353	7" H	7 lbs.

C. XD Simple Mount

Fits XD™ Dolly Only

PART #	SIZE	WT
40-D1354	9" H	7 lbs.





In the Ditch dollies are ergonomically designed to be balanced when carried. The spring loaded pin in the easy to operate cam-lock design self engages, locking the dolly wheels without your hand leaving the breakover bar. These dollies can be rolled to the recovery site, making them easy to use in tight spaces.

Speed® Dolly

Speed® Dolly Sets include:

- 2 Speed® Dolly Frames in Tuff Coat Black or Yellow Chromate Zinc finish.
- Aluminum or steel D.O.T. approved wheels.
- 2 Telescoping Aluminum Axles
- 1 Soft-Grip Lightweight Breakover Bar
- 2 Ratchet Straps
- 1 Operations Manual
- 4.80 x 8 Tires
- Choose from Aluminum or Steel Wheels




LOAD CAPACITY: 3,040 lbs.



Speed® Dolly Set
Tuff Coat Black Finish
with Aluminum Wheels

Part # 40-D2478
WT 176 lbs.

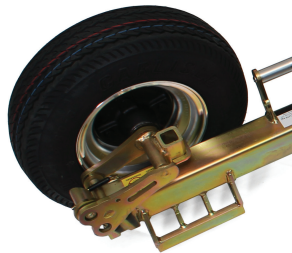

Speed® Dolly Set
Yellow Chromate Zinc Finish
with Aluminum Wheels

Part # 40-D2478P
WT 175 lbs.



Speed® Dolly Set
Tuff Coat Black Finish
with Steel Wheels

Part # 40-D2480
WT 180 lbs.




Speed® Dolly Set
Yellow Chromate Zinc Finish
with Steel Wheels

Part # 40-D2480P
WT 171 lbs.

XD™ (Xtreme Duty) Dolly


XD™ Dolly Sets include:

- 2 XD™ Dolly Frames in Tuff Coat Black or Yellow Chromate Zinc finish & Aluminum D.O.T. approved wheels.
- 2 Telescoping Aluminum Axles
- 1 Soft-Grip Lightweight Breakover Bar
- 2 Ratchet Straps
- 1 Operations Manual
- Carlisle 5.70 x 8 tires.
- Aluminum Wheels

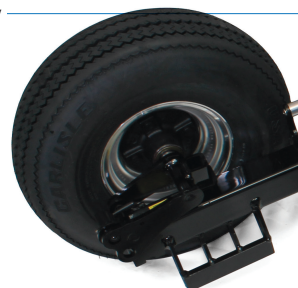

XD™ Dolly Set
Tuff Coat Black Painted Frame
with Aluminum Wheels

Part # 40-D2490
WT 200 lbs.



XD™ Dolly Set
Yellow Chromate Zinc Frame
with Aluminum Wheels

Part # 40-D2490P
WT 202 lbs.

LOAD CAPACITY: 4,000 lbs.



TowMate®

B/A TOP SELLER!



22" Economy Wireless Tow Light

This basic light features stop, tail, turn signals in a 22" lime green or yellow durable PVC housing. Available with plug-in or wired-in transmitter (specify when ordering). *Not iMon Compatible

PART #	TRANSMITTER	COLOR	UNIT	WT
25-TM22G	Plug-In	Green	EA	6 lbs.
25-TM22GHW	Wired-In	Green	EA	6 lbs.
25-TM22YEL	Plug-In	Yellow	EA	6 lbs.
25-TM22YHW	Wired-In	Yellow	EA	6 lbs.



24-1



24-1LED

B/A Magnetic Tow Lights

The everyday workhorse lights that have been used for years. Our lights include a 30' cord with 4way plug, 7' of cord between lights and magnets with covers to help prevent scratching. Available in Halogen or LED.


PART #	DESCRIPTION	UNIT	WT
24-1	Halogen	EA	7 lbs.
24-1LED	10-LED	EA	7 lbs.

New Jumper Cable Kit!

Power Plug Pro 30

PART #	UNIT	WT
T3-PRO30	KIT	18 lbs.

- Extra Long 30' Cables with 5' Truck Harness
- Made with Tangle-Free Vutron Cable
- Fits Top and Side Post Batteries
- Protective Coated Steel Clamps with Ergonomically Designed Handles.
- All Terminals are Shrink Wrapped.
- Heavy 4 Gauge Conductors Made with 100% Copper Wire
- Protective Coated Steel Clamps with Ergonomically Designed Handles.
- Designed for Heavy-Duty Demands
- Replacement Parts Also Available
- 500 AMP Capacity
- All Mounting Hardware and Instructions are Included.
- Built in Polarity Indicator. *When Green Indicator Light is Lit the Cables are Properly Connected. If Indicator is Not Lit, Check for Proper Connection.*

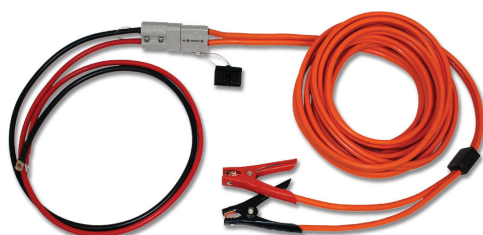

Replacement Plug

PART #	UNIT	WT
T3-700	EA	1 lb.


Standard Plug is Interchangeable with Most Popular Brands



Replacement Plug Cover

PART #	UNIT	WT
T3-700C	EA	1 lb.





Measuring Stick with 4' Arm
Measures from 5'10" (1.78m) to 15' (4.57m). Collapses down to 66" for easy storage.

PART # BA-MS4



Telescoping Measuring Stick
with 4' arm and carry bag. Uses both imperial and metric systems. Measures from 5'10" (1.78m) to 15' (4.57m). Collapses down to 53" (135cm) for easy storage.

PART # BA-MS15

Measuring Sticks feature a folding 48" cross arm. They are lightweight fiberglass and fold down for convenient storage.



Slip Plate® Graphite Lube
SLIP Plate® is formulated with a very high concentration of friction fighting graphite and a proprietary binder system to provide a long-lasting dry lubrication for the heaviest loads.

PART #
SP-33005
SP-33015
SP-33203

QUANTITY
6 Quarts/ Case
4 Gallons/ Case
12 Aerosol Cans/ Case



No-Skid®
Water-based acrylic no-skid coating will help reduce the risk of slipping or falling in any potentially slippery area. Sold in cases only; 4 gallons per case.



PART #
BA-NSB
BA-NSG
BA-NSW

COLOR
Black
Gray
White



Roller For No-Skid®
PART # BA-ROLLER



Brushes For Slide Rite®
PART #
BA-BRUSH2
BA-BRUSH3

SIZE
2"
3"



Tarp Straps

Sold In Case

Quantities of 50

PART #
38-TS10
38-TS15

LENGTH
10"
15"

PART #
38-TS21
38-TS31

LENGTH
21"
31"



B/A STAPLE PRODUCTS

Accessories

B/A OFFERING RAMSEY WINCH!



MAG-LOK®
LONG HANDLE TOOLS
Interconnectable Tool System

MAG-LOK® INTERCONNECTABLE TOOL SYSTEM
All The Tools You Need - Right Where You Need Them

The Mag-Lok® Interconnectable Tool System saves both valuable space and weight! Mag-Lok® is the first in the industry to offer this innovative concept of pairing industrial grade handles with interchangeable tool heads that are capable of standing up to the rigors of commercial use and can be easily secured.

The Mag-Lok® tool system not only saves you valuable space but also streamlines the storage of your equipment. Choose only the handle(s) that you need coupled with the job specific tool heads that you require!

Mag-Lok® provides the industry's first lifetime guarantee on all of its handles and tool heads.



Round Shovel Part# 52-M12  * Fiberglass Handle	Square Shovel Part# 52-M10  * Fiberglass Handle	Aluminum Scoop Part# 52-M14  * Fiberglass Handle	Nylon Tool Bag Part# 52-M14  (Photo Above In Use)	Long Broom Head Adapter Fits Most Popular Threaded Broom Heads  Part# 52-M19 Short Broom Head Adapter also available Part# 52-M18
Pick Axe Part# 52-M40  * Striking Handle	Mattock Part# 52-M42  * Striking Handle	Pry Bar Part# 52-M50  * Steel Handle	Road Rake Part# 52-M20  * Fiberglass Handle	Pike Hook Part# 52-M36  * Steel Handle
Pulaski Part# 52-M30  * Striking Handle	Fireman's Axe Part# 52-M34  * Striking Handle	Sledge Hammer Part# 52-M38  * Striking Handle	Leaf Rake Part# 52-M22  * Fiberglass Handle	Axe Part# 52-M32  * Striking Handle

ADDITIONAL BRANDS AVAILABLE THROUGH B/A PRODUCTS CO.





B/A **PRODUCTS CO.**

WE CARE ABOUT YOUR SAFETY.

Most accidents, whether they occur at work, at home or on the highway are caused by the failure to follow simple and fundamental safety rules or precautions. For this reason most accidents or injuries can be prevented by recognizing the root cause and doing something about it before the accident occurs. A careful and properly trained operator is the best insurance against an accident or injury.

Most of the products created and distributed by B/A Products Co. are OEM equivalents (often used by the OEM's) or built to specific and recognized industry standards to perform a specific function within the towing and recovery industry. These products are to be used in the very specific applications for which they were designed. The products offered for sale in this catalog are only to be used in the manner for which they were designed and within the assigned work load limits.

There are many nationally recognized trainers and training programs. B/A Products Co. assumes those who purchase and use our products are properly trained and familiar with the applications for which an individual product was designed. B/A Products Co. assumes no liability for improperly trained operators or the negligent or improper use, intentional or otherwise, of any of the products we create or distribute. If there is any uncertainty as to the proper usage, do not proceed. Seek competent professional assistance.



Making this industry safer is a collaborative effort and we know we can't do it alone. Please help us raise awareness for the move over law so we can keep our Tow Operators safe.

BAPROD.COM/MOVE-OVER-VIDEO

FOR MORE INFORMATION PLEASE VISIT OUR
WEBSITE: **WWW.BAPROD.COM**

© B/A Products Co. 2017

8925 McGaw Court

Columbia, MD

T: 800.327.3301

F: 410.381.6358

WWW.BAPROD.COM

B/A Products Distributed by:



11-17

